


Beamer ceiling mount



Beamfix 1 Beamer ceiling mount

- Tilt adjustment
 - **Max. load capacity 30 kg**
 - With universal mounting system suitable for all standard projector makes
 - All-inclusive set with fixing material
 - TÜV/GS equipment safety certificate
- black steel




Article	Order no.	PU
Beamfix 1	042 318	1 set



Beamfix 2 Beamer ceiling mount

- Swivels and tilts at ball joint
 - **Max. load capacity 30 kg**
 - Concealed cable management
 - With universal mounting system suitable for all standard projector makes
 - All-inclusive set with fixing material
 - TÜV/GS equipment safety certificate
- black steel




Article	Order no.	PU
Beamfix 2	042 316	1 set



Ceiling extension for Beamfix 2

- Adjustable from 980-1600 mm
 - With concealed cable management
- black steel




Article	Order no.	PU
Ceiling extension for Beamfix 2	042 317	1 set



Ceiling extension for Beamfix 1/Beamfix 2

- Adjustable from 800-1500 mm
- black steel



Article	Order no.	PU
Ceiling extension for Beamfix 1/Beamfix 2	042 319	1 set


See page for fitting instructions 9.315

Microwave mounting bracket




Microwave mounting bracket

- Adjustable support area
Width up to 400 mm max.
depth 360 - 500 mm
 - All-inclusive set with fixing material
 - TÜV/GS equipment safety certificate
- steel, white

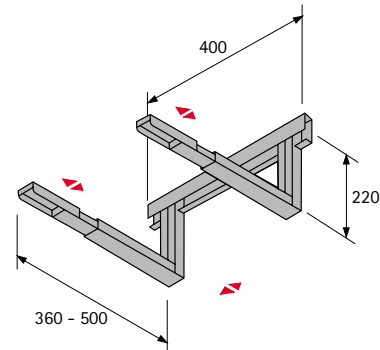

Article	Support area		Max. load capacity/kg	Order no.	PU
	width mm	depth mm			
Microwave mounting bracket	max. 400	360 - 500	60	070 878	1 set

**Fitting instructions -
always follow carefully**

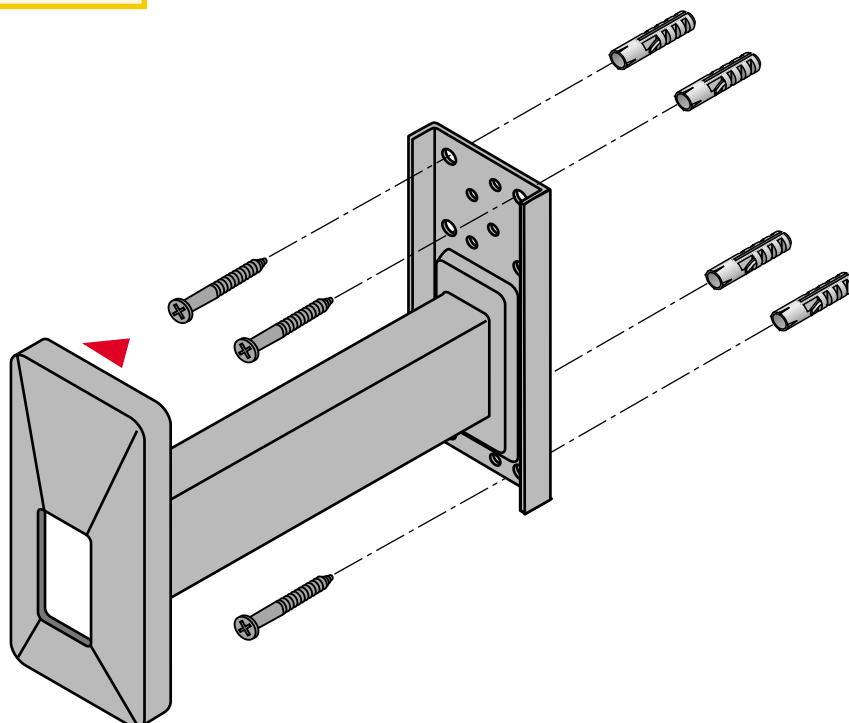

1. The bracket must be fixed to a wall/ceiling made of solid wood, brick or concrete.
2. The fixing material provided with the all-inclusive sets is designed for brick walls/ceilings.
3. Special commercially available fixing elements must be used for walls/ceilings made of other materials.
4. The nature of wall/ceiling materials is beyond our control.

Electric lifting platforms



Single scissor



Double scissor

Electric lifting platforms can be used for a variety of purposes around the home, in offices, conference rooms, hotels, schools ...

They quickly hide away monitors, hi-fi systems, visual display units, terminals, projectors and protect them from unauthorised access and dirt.

Technical data:

- 230 V/50 Hz
- Spindle-driven scissor mechanism
- Overload and overheating protection
- Equipped with push-button switch as standard
- Alternatively, lifting platforms are also available in a version with **push-button switch + radio remote control**
- Lifting height can be stopped at each stage and is adjustable.
- The receiver unit in the remote-controlled version can be concealed, i.e. need not be directly in view when the platform is in operation, obviating the necessity for visible infrared receiver.
- For safety reasons:
There are no areas to cause crushing injuries when assembling the lifting platform!

black steel profile

Electric lifting platform with single scissor

Max. load capacity kg	Total height mm	Installation height mm	Lifting height mm	Length x Width mm	Weight kg	With push-button switch	With push-button + radio remote control	PU
200	490	130	360	600 x 430	26	070 836	070 837	1
200	670	130	540	830 x 430	30	070 840	070 841	1
200	770	130	640	910 x 430	34	070 844	070 845	1
150	930	130	800	1120 x 430	38	070 846	070 847	1

Electric lifting platform with double scissor

Max. load capacity kg	Total height mm	Installation height mm	Lifting height mm	Length x Width mm	Weight kg	With push-button switch	With push-button + radio remote control	PU
80	930	240	690	600 x 430	32	070 848	070 849	1
80	1290	240	1050	830 x 430	38	070 850	070 851	1
80	1490	240	1250	910 x 430	44	070 852	070 853	1

Electric lifting platforms

Assembly

