

Drawer runners for wooden drawers

- ▶ KA 4532 full extension runner with Push to open for side installation
- ▶ Load capacity 35 kg




- ▶ **Push to open** - the precision activating mechanism opens the drawer automatically and in virtual silence - a light press is all it takes!
- ▶ A release lever makes the drawer easy to remove and reinstall
- ▶ Precision control for moving smoothly and freely and high lateral stability
- ▶ For drawers with grooved, rebated or loosely fitted drawer bottom panel
- ▶ Load capacity to EN 15338, Level 2
- ▶ Galvanised steel, blue passivated

Ball bearing runner KA 4532 Push to open, 12.7 mm installed width

Nominal length / drawer length NL mm	Minimum carcass depth KT mm	Hole spacing b1 mm	Hole spacing b2 mm	Hole spacing b3 mm	Hole spacing C mm	Order no.	PU
300	304				192	9 114 281	1/10 pairs
350	354	64			242	9 114 282	1/10 pairs
400	404	96			292	9 114 283	1/10 pairs
450	454	160			342	9 114 284	1/10 pairs
500	504	96	96		392	9 114 285	1/10 pairs
550	554	96	128		442	9 114 286	1/10 pairs
600	604	96	128	96	492	9 114 288	1/10 pairs
650	654	96	128	128	542	9 114 289	1/10 pairs
700	704	96	128	192	592	9 114 290	1/10 pairs

Planning dimensions

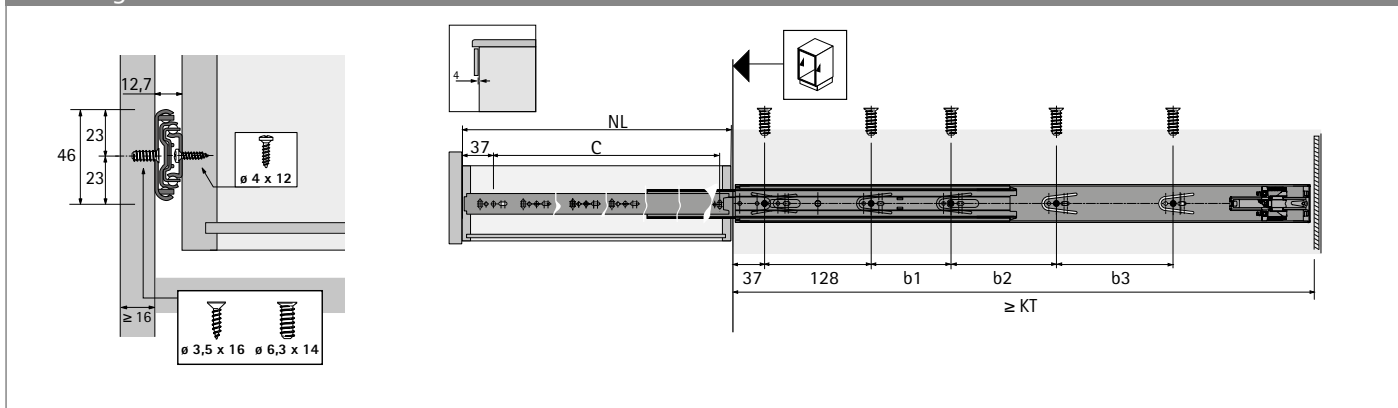

Advice

- ▶ For technical information, see page 1610 - 1612
- ▶ For accessories, see page 1636 - 1641